

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.



(72) CHEN, TAI-ANN, US

(72) KUO, WEN-YI, US

(71) LUCENT TECHNOLOGIES INC., US

(51) Int.Cl.⁷ H04Q 7/38

(30) 1999/01/11 (60/115,511) US

(30) 1999/11/24 (09/448,808) US

(54) **METHODE D'ASSIGNATION DYNAMIQUE DE CODES DE
CANaux DE DIVERSES LONGUEURS DANS DES SYSTEMES
DE COMMUNICATION SANS FIL**

(54) **METHODS OF DYNAMICALLY ASSIGNING CHANNEL CODES
OF DIFFERENT LENGTHS IN WIRELESS
COMMUNICATION SYSTEMS**

(57) In a wireless communication system, unique methods are presented to dynamically assign channel codes of different lengths in a manner to maintain orthogonality among assigned channels. In one embodiment of the method of the invention, channel codes that require relatively long-lengths are assigned from a first end of a list of unassigned channel codes and channel codes of a shorter length are assigned from an opposing end of a list of unassigned channel codes. Assignment of a shorter length code sequence is made if the longer-length channel codes that depend from the proposed shorter-length code sequence are available. In another embodiment of the invention, the availability of short length channel codes is derived directly from the availability of the longest length channel codes. In this embodiment of the invention, a group of longest-length channel codes that contain a common shorter-length code of the desired length are checked for availability. If all the codes of the group are available then the common shorter-length code may be assigned to the transmission. Further, in accordance with the methods of the invention by assigning transmissions that require longer-length sequences from a first end of a list of channel codes and shorter length sequences from an opposing end of a list of channel codes, the number of channels available for shorter length sequences is maximized.



Chen 1-20

METHODS OF DYNAMICALLY ASSIGNING CHANNEL CODES OF DIFFERENT LENGTHS IN WIRELESS COMMUNICATION SYSTEMS

Abstract

In a wireless communication system, unique methods are presented to
5 dynamically assign channel codes of different lengths in a manner to maintain
orthogonality among assigned channels. In one embodiment of the method of the
invention, channel codes that require relatively long-lengths are assigned from a first end
of a list of unassigned channel codes and channel codes of a shorter length are assigned
10 from an opposing end of a list of unassigned channel codes. Assignment of a shorter
length code sequence is made if the longer-length channel codes that depend from the
proposed shorter-length code sequence are available.

In another embodiment of the invention, the availability of short length channel
codes is derived directly from the availability of the longest length channel codes. In this
embodiment of the invention, a group of longest-length channel codes that contain a
15 common shorter-length code of the desired length are checked for availability. If all the
codes of the group are available then the common shorter-length code may be assigned
to the transmission.

Further, in accordance with the methods of the invention by assigning
transmissions that require longer-length sequences from a first end of a list of channel
20 codes and shorter length sequences from an opposing end of a list of channel codes, the
number of channels available for shorter length sequences is maximized.

Chen 1-20

26

Claims:

1. In a wireless communication system, a method of dynamically assigning channel codes from a plurality of channel codes of different lengths comprising the steps of:

5 selecting a channel code from a plurality of channel codes of length n ,
and

 assigning said channel code of length n when channel codes that depend from said selected channel code are not assigned wherein orthogonality among assigned channel codes of differing lengths is maintained.

10 2. The method as recited in Claim 1 wherein the step of selecting said channel code further comprises the steps of

 selecting said channel code using a first progression if said channel code length n is one of a known plurality of channel code lengths; and

 selecting said code sequence using a second progression if said code
15 sequence length n is not one of said known plurality of channel code lengths.

3. The method as recited in Claim 2 wherein said first progression comprises the step of searching a list of channel codes of length n , from a first end of said list.

4. The method as recited in Claim 2 wherein said first progress comprises the step of searching a list of channel codes of length n from the last list entry assigned.

20 5. The method as recited in Claim 2 wherein said second progression comprises the step of searching a list of channel codes of length n from a second end of said list.

 6. The method as recited in Claim 2 wherein said second progression
25 comprises the step of searching a list of channel codes of length n from the last list entry assigned.

Chen 1-20

27

7. The method as recited in Claim 1 wherein said channel codes are arranged in an ordered list in accordance with

$$W_{2^n}[j] \Rightarrow W_{2^{n+1}}[j] \text{ and } W_{2^{n+1}}[j + 2^n]$$

wherein n is code length of order n ; and

5

j is an individual element of code length of order n .

8. The method as recited in Claim 1 wherein said selected channel code of length n is assigned when channel codes of longest length that depend from said selected channel code are not assigned.

9. The method as recited in Claim 2 wherein said known plurality of code lengths is composed of a set of code lengths above length 63.

10. The method as recited in Claim 2 wherein said known plurality of code lengths is composed of a set of code lengths above 127.

11. The method as recited in Claim 1 wherein a plurality of channels are *a priori* set unavailable for assignment.

12. The method as recited in Claim 11 wherein channel code 16 of code order 128 is unavailable for assignment.

13. The method as recited in Claim 11 wherein channel code 16 of code order 256 is unavailable for assignment.

14. The method as recited in Claim 11 wherein channel codes 0, 16, 32, 64, 96, 128, 160, 192, and 224 of code order 256 are unavailable for assignment.

15. The method as recited in Claim 14 wherein channel codes 0, 16, 32, 48, 64, 80, 96, and 112 of code order 128 are unavailable for assignment.

Chen 1-20

28

16. In a wireless communication system, a method of dynamically assigning channel codes from a plurality channel codes of different code lengths comprising the steps of:

determining a channel code of length n ; and

5 assigning said channel code of length n when the longest length channel codes that depend from said selected code sequence are not assigned wherein orthogonality among assigned channel codes of differing code lengths is maintained.

17. The method as recited in Claim 16 wherein the step of selecting a channel code further comprises the steps of

10 determining said channel code using a first progression if said channel code length n is one of a known plurality of code lengths; and

determining said code sequence using a second progression if said channel code length n is not one of said known plurality of code lengths.

18. The method as recited in Claim 17 wherein said first progression
15 comprises the step of searching a list of channel codes of longest-length from a first end of said list.

19. The method as recited in Claim 17 wherein said second progression comprises the step of searching a list of channel codes of longest-length from a second end of said list.

20. The method as recited in Claim 16 wherein the step of determining a channel code of length n is further comprised of determining the availability of a set of longest-length channel codes wherein said set of longest-length channel codes contain common values of shorter-length n .

21. The method as recited in Claim 20 wherein said set of longest-length
25 channel codes is of order 256.

Chen 1-20

29

22. The method as recited in Claim 20 wherein said set of longest-length channel codes is of order 128.

23. The method as recited in Claim 16 wherein said channel codes are arranged in an ordered list in accordance with

$$5 \quad W_{2^n}[j] \Rightarrow W_{2^{n+1}}[j] \quad \text{and} \quad W_{2^{n+1}}[j + 2^n]$$

wherein n is code length of order n ; and

j is an individual element of code length of order n .

24. The method as recited in Claim 17 wherein said known plurality of code lengths is composed of a set of code lengths above 63.

10 25. The method as recited in Claim 17 wherein said known plurality of code lengths is composed of a set of code lengths above 127.

26. The method as recited in Claim 16 wherein a plurality of channels are *a priori* set unavailable for assignment.

15 27. The method as recited in Claim 26 wherein channel code 16 of code order 128 is unavailable for assignment.

28. The method as recited in Claim 26 wherein channel code 16 of code order 256 is unavailable for assignment.

29. The method as recited in Claim 26 wherein channel codes 0, 16, 32, 64, 96, 128, 160, 192, and 224 of code order 256 are unavailable for assignment.

20 30. The method as recited in Claim 26 wherein channel codes 0, 16, 32, 48, 64, 80, 96, and 112 of code order 128 are unavailable for assignment.

Chen 1-20

1

METHODS OF DYNAMICALLY ASSIGNING CHANNEL CODES OF DIFFERENT LENGTHS IN WIRELESS COMMUNICATION SYSTEMS

Related Applications

The present invention is related to Provisional U.S. Patent Application 60/115511,
5 having a filing date of January 11, 1999, entitled SMART CODE USAGE FOR
CDMA2000 SYSTEMS, which is assigned to the same assignee and is incorporated by
reference herein.

Field Of The Invention

This invention relates to wireless communication systems and, more particularly,
10 to methods of assigning channel codes in such communication systems.

Background Of The Invention

Wireless communication systems have been developed to allow transmission of
information signals between an originating location and a destination location. Both
analog (first generation) and digital (second generation) systems have been developed to
15 transmit information signals over communication channels linking the source and
destination locations. Digital methods tend to afford several advantages over analog
systems. For example, improved immunity to channel noise and interference, increased
capacity, and encryption for secure communications are advantages of digital systems
over analog systems.

20 While first generation systems were primarily directed to voice communication,
second generation systems are required to support both voice and data applications.
Numerous techniques are known in second-generation systems for handling data
transmissions that have different transmission requirements -- data transmission being
typically of relatively short duration, as compared to voice transmission, and usually not
25 requiring continuous access to the communication channel. Several modulation/coding
arrangements have been developed, such as frequency division multiple access (FDMA),
time division multiple access (TDMA) and code division multiple access (CDMA), to

Chen 1-20

2

increase the number of users that can access a wireless network. CDMA systems are more immune to multiple path distortion and co-channel interference than FDMA and TDMA systems and reduce the burden of frequency/channel planning that is common with FDMA and TDMA systems.

5 In a CDMA system, a binary code sequence (i.e., channel code) is assigned to each active user within a cell to uniquely identify the user and spread the user's signal over a larger bandwidth. Multiplied by the assigned code, the user's signal is spread over the entire channel bandwidth, which is wider than the user signal bandwidth. The ratio of the system channel bandwidth to the user's bandwidth is the "spreading gain" of the system. The capacity of the CDMA system is proportional to the "spreading gain" 10 for a given signal-to-interference (S/I) level. After reception of the transmitted signal, the signal of each user is separated - i.e., de-spread, from the signals of other users by using a correlator keyed to the code sequence of the desired signal.

First-generation analog and second-generation digital systems are designed to support voice communication with limited data communication capabilities. Third- 15 generation wireless systems, using wide-band channel management technologies, are expected to effectively handle a large variety of services, such as voice, video, data and imaging. Among the features that will be supported by third-generation systems is the transmission of high-speed data between a mobile terminal and a land-line network. As 20 is known, high-speed data communications is often characterized by a short transmission "burst" at a high data transmission rate followed by some longer period of little or no transmission activity from the data source. To accommodate the burst nature of such high-speed data services in third-generation systems, it is necessary for the communications system to assign a large bandwidth segment (corresponding to the high 25 data rate) from time to time for the duration of the data burst. With the ability of the third generation systems to handle such bursty high-speed data transmission, throughput and delay for users can be advantageously improved. However, because of the large amount of instantaneous bandwidth required for transmission of a burst of high-speed data, the management and, particularly the allocation, of channel codes thereto, must be

Chen 1-20

3

handled with care to avoid unwarranted interference with other services using the same frequency allocation.

In a typical wireless communication system, for example, IS-95, a voice user may have an assigned code sequence of 64 chips per symbol, however, because of time and bandwidth constraints, a typical data user may require a code sequence that has a significantly fewer number of chips per symbol. Hence, in the next generation communication systems assignment of codes of different lengths is necessary.

Summary Of The Invention

The invention described herein is a method to manage the assignment of channel codes of different lengths while maintaining an orthogonal relationship among the assigned codes. By selectively assigning longer length codes in the presence shorter-length codes or shorter-length channel codes in the presence of longer-length channel codes, channels codes of different lengths may be assigned in an order that avoids conflicts and maximizes the number of channel codes available for short-length code assignments (i.e., high data rate transmission).

A novel method of managing the selection of channel codes of different lengths from the available channel codes is disclosed. The methodology first distinguishes between transmissions that may use relatively long length channel codes, —e.g., voice and low data rates, and those that must use relatively short length channel codes. Long length channel codes are selected using one scheme to access a list of channel codes, while shorter-length channel codes are selected using a second scheme to access the same list of channel codes. More specifically, in accordance with one method of the invention, longer-length channel codes are selected from one end of a list of available channels codes while shorter-length channel codes are selected from an opposing end of the same list of channel codes. Accordingly, a larger number of channel codes remain grouped together for assignment to short-length code transmissions.

Further, to avoid conflicts and maintain orthogonality among the assigned codes, shorter-length channel codes are assigned after confirming that those longer-length

Chen 1-20

4

channel codes that depend from a proposed shorter length channel code are available for assignment. If the dependent longer-length channel codes are not available for assignment then the proposed shorter-length channel code is also not available for assignment. Limiting shorter-length channel codes to channel codes in which dependent
5 longer-length channel codes are available insures that a proposed shorter-length channel code sequence remains orthogonal to different length channel codes that are already assigned.

Brief Description Of The Figures

The advantages, nature and various additional features of the invention will
10 appear more fully upon consideration of the illustrative embodiments to be described in detail in connection with the accompanying drawings. In the drawings:

Figure 1 illustrates a typical Walsh Coding Tree structure;

Figure 2 represents a flow chart illustrating the method steps of one embodiment
of the present invention; and

15 Figure 3 represents a flow chart illustrating the method steps of a second embodiment of the present invention.

It is to be understood that these drawings are for purposes of illustrating the
inventive concepts of the present invention. It will be appreciated that the same
reference numerals, possibly supplemented with reference characters where appropriate,
20 have been used throughout the figures to identify corresponding parts.

Detailed Description Of The Invention

Figures 1 through 3 and the accompanying detailed description contained herein
are to be used as illustrative examples of exemplary embodiments of the present
invention and should not be construed as the only manner of practicing the invention.

25 The focus of early wireless systems, particularly first generation analog systems,
was primarily voice communication. With second generation wireless systems, including

Chen 1-20

5

CDMA, TDMA and GSM, came varying degrees of improvement in terms of voice quality, network capacity and enhanced services. However, while second generation systems are suitable to the provision of voice, low rate data, fax and messaging, they are generally not able to effectively and efficiently address requirements for high speed mobile data rates. The evolution to third generation wireless communications represents, essentially, a paradigm shift to the world of multimedia mobile communications, where users will have access not just to voice services but also to video, image, text, graphic and data communications. The third generation networks are expected to provide mobile users with data rates up to 2 Mbps.

10 Nonetheless, in wireless networks supporting these higher speed data communications applications, channel utilization must be managed very carefully to avoid delays in transmission caused by inefficient channel code assignment. As will be shown, the invention provides a novel methodology to assign channel codes of different lengths to minimize interference between different types of transmissions and to
15 maximize the number of users.

As is known in the art, orthogonal functions are used to improve the bandwidth efficiency of spread spectrum systems. Each user in a cell uses one member of a set of binary sequences for transmission. Typically, binary sequences (channel codes) generated by Walsh or Hadamard functions are used in CDMA systems. Although the
20 method of the present invention is disclosed with regard to Walsh functions, it would be understood by one skilled in the art that the novel methodology disclosed herein is applicable to any set of channel coding sequences that may be used to distinguish one user for another.

Walsh functions are special square matrices in which the rows are orthogonally
25 related. Typical CDMA systems-- e.g., a TIA IS-95 CDMA system, use one of 64 binary coding sequences that are, in this case, generated by 64 codes-word rows of a special square matrix of Walsh functions.

Chen 1-20

6

As is known in the art, a Walsh function of block length of 2 may be expressed as:

$$W_2 = \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \quad [1]$$

In this example there are two code-word rows – i.e., 1 1 and 1 -1.

5 A second example of a Walsh function of block length 2 may be expressed as:

$$W_2 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix} \quad [2]$$

Walsh functions of higher order block length may be generated from a lower order Walsh function using the following relationship:

$$W_{2^{n+1}} = \begin{bmatrix} W_{2^n} & \overline{W_{2^n}} \\ W_{2^n} & \overline{W_{2^n}} \end{bmatrix} \quad [3]$$

10

where $\overline{W_{2^n}}$ is the zero- one transformation of W_{2^n}

A Walsh function of block length 4 thus may be expressed as:

$$W_4 = \begin{bmatrix} W_2 & \overline{W_2} \\ W_2 & \overline{W_2} \end{bmatrix} \quad [4]$$

where $\overline{W_2}$ is the transformation of W_2

15 Using the expression for W_2 as expressed in Equation 1, a Walsh function of block length 4 may be represented as:

$$W_4 = \begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 \end{bmatrix} \quad [3]$$

Chen 1-20

7

Similarly, a Walsh function of order 8 may be generated from a Walsh function of 4 as:

$$W_8 = \begin{bmatrix} W_4 & W_4 \\ W_4 & W_4 \end{bmatrix} \quad [4]$$

And a Walsh function of order 64, may be generated using the following expression:

$$W_{64} = \begin{bmatrix} W_{32} & W_{32} \\ W_{32} & W_{32} \end{bmatrix} \quad [5]$$

Equation 5 represents a square matrix of 64 uniquely identified rows (and columns). The 64 code-word rows provide for the unique identification of 64 users. In a typical wireless communication system using Walsh functions of block length 64, each user is assigned a unique code-word row and the user's data symbols are multiplying by the assigned code-word row. Each user symbol is essentially divided into 64 Walsh "chips" that the receiver uses to distinguish the transmitted symbols of one user from those of another.

Typically, the time to transmit a single Walsh chip is 0.814 microseconds (1/1.2288 Mhz). Thus, in a IS-95 system using 64 chips per symbol, the transmission of one symbol requires 52.08 microseconds.

Although a IS-95 system is capable of using 64 channel codes for transmission, not all are available for user traffic. Some channel codes are necessarily used by the wireless system to maintain proper coordination between transmitting and receiving sites, i.e. system overhead. In a IS-95 system, typically, three to nine channel codes are pre-assigned for dedicated system overhead operations. One channel code is dedicated for synchronization, one channel code is dedicated for a pilot channel and one to seven channel codes are dedicated for paging.

Chen 1-20

8

To increase the number of users per frequency channel and to provide new services, additional CDMA systems have been proposed. One proposed CDMA system entitled, CDMA 2000-1X (3G1X), increases the number of channel codes to 128 by using 128 chips per symbols. In a second proposed CDMA system, entitled CMDA
 5 2000 -3X (3G3X), the number of chips is increased to 256. As would be understood by those skilled in the art, the channel codes of 3G1X and 3G3X systems, using channel codes generated by Walsh block lengths of order 128 and 256, respectively, may be generated by continuing the progression of Walsh matrix generation expressed in Equation 3 and Equation 5.

10 While these next generation systems increase the number of potential users that may be transmitting on a single frequency, the time necessary to transmit high rate digital data also increases. For example, in a 3G3X system, transmitting 256 chips for each user symbol the time of transmission of a single symbol increases significantly. Considering
 15 a typical chip time of 0.804 microseconds, the transmission of one symbol, of 256 chips, is 833 microseconds. While this time of transmission may be acceptable for voice and some low data-rate transmissions, this transmission time becomes excessively long for high data-rate transmissions. Accordingly, for high data rate transmissions, a channel code sequence of lower order must necessarily be used.

20 However, when assigning channel codes of different lengths the orthogonality among channel codes of different lengths is not easily determined from the matrix notation when, for example, using Walsh codes. Thus, in order to determine the orthogonal relationship between codes of different length, in this case using Walsh functions, a Walsh Family Tree structure may be formulated in accordance with the rule that

$$25 \quad W_{2^n}[j] \Rightarrow W_{2^{n+1}}[j] \quad \text{and} \quad W_{2^{n+1}}[j+2^n] \quad [6]$$

Figure 1 illustrates a Walsh Family tree generated in accordance with Equation 6 for Walsh block lengths of order 2^n for $n = 1, 2 \dots 8$ (i.e., code-rows of 2 through 256). In this illustration, elements 100.0, 100.1 represent the two channels of a Walsh code

Chen 1-20

9

length of order 2 (W_2). Elements 102.0, 102.1, 102.2, 102.3 represent the four channels of Walsh code length of order 4 (W_4). In accordance with Equation 6, element 100.0 generates elements 102.0, 102.2 and element 100.1 generates elements 102.1, 102.3. As will become apparent to those skilled in the art, the numbering of elements in the depicted family tree correspond to rows in the related Walsh matrix. That is, element 100.0 corresponds to row 0 and element 100.1 corresponds to row 1 of the Walsh matrix expressed in Equation 1 and elements 102.0, 102.1, 102.2, 102.3 correspond to rows 0, 1, 2, and 3, respectively, of the Walsh matrix of order 4 expressed in Equation 4. Similarly, the elements of the Walsh function of order 4 generate eight elements as a Walsh function of order 8 wherein element 102.0 generates elements 104.0, 104.4, element 102.2 generates elements 104.2, 104.6, element 102.1 generates elements 104.1, 104.5 and element 102.3 generates 104.3, 104.7. Accordingly, and as previously discussed, an IS-95 CDMA system would select channel codes from the 64 code-word rows represented by elements 112.0 through 112.63. Further, a 3G3X system would typically select a channel code from the 256 code-word rows represented by elements 116.0 through 116.255. As would be understood by those skilled in the art, the terminology, channel code, code-word row and code sequence, have been used synonymously herein, and henceforth, will be used interchangeably.

The code sequences for the channel codes using a Walsh function expressed in Equation 1 may now be determined for each of the elements of Figure 1. These channel code sequences are summarized in Table 1 for W_2 , W_4 and W_8 wherein the channel codes for W_2 are represented by Equation 1.

As would be understood in the art, channel codes of higher order using Walsh functions may be determined by expanding the binary sequences of Table 1. As the details of the generation of channel codes sequences of higher order would be understood by one skilled in the art it is not necessary to continue the development of such sequences herein.

W_2	code	W_4	code	W_8	code
100.0	1 1	102.0	1 1 1 1	104.0	1 1 1 1 1 1 1 1
				104.4	1 1 1 1 -1 -1 -1 -1
		102.2	1 1 -1 -1	104.2	1 1 -1 -1 1 1 -1 -1
				104.6	1 1 -1 -1 -1 -1 1 1
100.1	1 -1	102.1	1 -1 1 -1	104.1	1 -1 1 -1 1 -1 1 -1
				104.5	1 -1 1 -1 -1 1 -1 1
		102.3	1 -1 -1 1	104.3	1 -1 -1 1 1 -1 -1 1
				104.7	1 -1 -1 1 -1 1 1 -1

Table 1: Code Sequences for Walsh Codes-Row

From Table 1 it can be observed that the elements in the rows of longer-length codes are dependently related to shorter-length channel codes. For example, the codes represented by elements 102.0, 102.2 depend from the code represented by element 100.0 as the longer-length codes represented by elements 102.0, 102.2 contain the shorter-length channel code of element 100.0 (i.e., 1 1 and 1 -1). Similarly, codes represented by elements 104.0, 104.4 depend from the shorter-length code represented by element 102.0 and codes represented by elements 104.1, 104.3 depend from the shorter-length code represented by element 102.1. In this example of channel codes two signals that are assigned to elements 104.0, 104.4 respectively, are uniquely identified as the channels are unique and orthogonally related. However, when one signal is assigned to the channel code represented by element 102.0 and one signal is assigned to the

Chen 1-20

11

channel code represented by element 104.0, the assigned channel codes do not uniquely identify the two signals. In this case, the transmissions of these two users would not be decoded properly.

Table 2 tabulates the relationship among the elements of the Walsh functions of different lengths in accordance with Equation 5. Column 1 of Table 2 corresponds to the rows of a 256-chip Walsh code matrix, Column 2 corresponds to the rows of a 128-chip Walsh code matrix and Column 3 corresponds to the rows of a 64-chip Walsh code matrix. Column 8 corresponds to the two rows of a 2-chip Walsh code matrix. Table 2 may now be related to Figure 1. For example, the first row in Table 2 corresponds to the tree structure elements 100.0, 102.0, 104.0, 108.0, 110.0, 112.0, 114.0, 116.0. The second row, in Table 2, corresponds to tree structure elements 100.0, 102.0, 104.0, 108.0, 110.0, 112.0, 114.0, 116.128. From Table 2 the relationship between longer-length channel codes and shorter-length channel codes for all the codes of up to a 256-chip channel code may be determined.

From Table 1 and Table 2, it may be observed that channel codes of different chip length that are in the same row are not orthogonally related as the longer-length code is generated from a shorter-length code. For example, in the 8th row of Table 2, the 224th row in column W_{256} is generated from the 96th row in column W_{128} and the 32th row in W_{64} . Thus, $W_{256}[224]$ cannot be used concurrently with $W_{128}[96]$ or $W_{64}[32]$ otherwise the advantage of orthogonal modulation is destroyed.

Accordingly, in the operation of, for example, a 3G3X CDMA system using channel codes of length of 256, a high data signal cannot be assigned shorter-length channel code sequence $W_{64}[32]$ if any of the channel codes $W_{256}[32]$, $W_{256}[160]$, $W_{256}[96]$ or $W_{256}[224]$ are assigned. Similarly, when a high data rate transmission is assigned to shorter-length channel sequence, for example, $W_{64}[32]$, then the longer-length channel code sequences that depend from this shorter-length sequence are not available for assignment.

Jan-07-2000 05:22pm From-

T-116 P.002/007 F-075

12

2
Table . Family tree of Walsh codes

W_{256}	W_{128}	W_{64}	W_{32}	W_{16}	W_8	W_4	W_2	
0	0	0	0	0	0	0	0	0
128	0	0	0	0	0	0	0	0
64	64	0	0	0	0	0	0	0
192	64	0	0	0	0	0	0	0
32	32	32	0	0	0	0	0	0
160	32	32	0	0	0	0	0	0
96	96	32	0	0	0	0	0	0
224	96	32	0	0	0	0	0	0
16	16	16	16	0	0	0	0	0
144	16	16	16	0	0	0	0	0
80	80	16	16	0	0	0	0	0
208	80	16	16	0	0	0	0	0
48	48	48	16	0	0	0	0	0
176	48	48	16	0	0	0	0	0
112	112	48	16	0	0	0	0	0
240	112	48	16	0	0	0	0	0
8	8	8	8	8	0	0	0	0
136	8	8	8	8	0	0	0	0
72	72	8	8	8	0	0	0	0
200	72	8	8	8	0	0	0	0
40	40	40	8	8	0	0	0	0
168	40	40	8	8	0	0	0	0
104	104	40	8	8	0	0	0	0
232	104	40	8	8	0	0	0	0
24	24	24	24	8	0	0	0	0
152	24	24	24	8	0	0	0	0
88	88	24	24	8	0	0	0	0
216	88	24	24	8	0	0	0	0
56	56	56	24	8	0	0	0	0
184	56	56	24	8	0	0	0	0
120	120	56	24	8	0	0	0	0
248	120	56	24	8	0	0	0	0
4	4	4	4	4	4	4	0	0
132	4	4	4	4	4	4	0	0
68	68	4	4	4	4	4	0	0
196	68	4	4	4	4	4	0	0
36	36	36	4	4	4	4	0	0
164	36	36	4	4	4	4	0	0
100	100	36	4	4	4	4	0	0
228	100	36	4	4	4	4	0	0
20	20	20	20	4	4	4	0	0
148	20	20	20	4	4	4	0	0
84	84	20	20	4	4	4	0	0
212	84	20	20	4	4	4	0	0
52	52	52	20	4	4	4	0	0
180	52	52	20	4	4	4	0	0
116	116	52	20	4	4	4	0	0
244	116	52	20	4	4	4	0	0

TABLE 2 Appendix 1

07-2000 05:23pm From-

13

T-115 P.003/007 F-075

121	12	121	12	12	41	01	0
140	13	121	12	12	41	01	0
76	76	121	12	12	41	01	0
204	76	121	12	12	41	01	0
44	44	44	12	12	41	01	0
172	44	44	12	12	41	01	0
108	108	44	12	12	41	01	0
236	108	44	12	12	41	01	0
28	28	28	28	12	41	01	0
156	28	28	28	12	41	01	0
92	92	28	28	12	41	01	0
220	92	28	28	12	41	01	0
60	60	60	28	12	41	01	0
188	60	60	28	12	41	01	0
124	124	60	28	12	41	01	0
252	124	60	28	12	41	01	0
2	2	2	2	2	2	2	0
130	2	2	2	2	2	2	0
66	66	2	2	2	2	2	0
194	66	2	2	2	2	2	0
34	34	34	2	2	2	2	0
162	34	34	2	2	2	2	0
98	98	34	2	2	2	2	0
226	98	34	2	2	2	2	0
18	18	18	18	2	2	2	0
146	18	18	18	2	2	2	0
82	82	18	18	2	2	2	0
210	82	18	18	2	2	2	0
50	50	50	18	2	2	2	0
178	50	50	18	2	2	2	0
114	114	50	18	2	2	2	0
242	114	50	18	2	2	2	0
10	10	10	10	10	2	2	0
138	10	10	10	10	2	2	0
74	74	10	10	10	2	2	0
202	74	10	10	10	2	2	0
42	42	42	10	10	2	2	0
170	42	42	10	10	2	2	0
106	106	42	10	10	2	2	0
234	106	42	10	10	2	2	0
26	26	26	26	10	2	2	0
154	26	26	26	10	2	2	0
90	90	26	26	10	2	2	0
218	90	26	26	10	2	2	0
58	58	58	26	10	2	2	0
186	58	58	26	10	2	2	0
122	122	58	26	10	2	2	0
250	122	58	26	10	2	2	0
6	6	6	6	6	6	2	0
134	6	6	6	6	6	2	0
70	70	6	6	6	6	2	0

TABLE 2 PAGE 2

Jan-07-2000 05:23pm From-

14

T-115 P.004/007 F-075

198	70	61	6	6	6	3	0
38	38	38	6	6	6	21	0
166	38	38	6	6	6	21	0
102	102	38	6	6	6	21	0
230	102	38	6	6	6	21	0
22	22	22	22	6	6	21	0
150	22	22	22	6	6	21	0
86	86	22	22	6	6	21	0
214	86	22	22	6	6	21	0
54	54	54	22	6	6	21	0
182	54	54	22	6	6	21	0
118	118	54	22	6	6	21	0
246	118	54	22	6	6	21	0
14	14	14	14	14	6	21	0
142	14	14	14	14	6	21	0
78	78	14	14	14	6	21	0
206	78	14	14	14	6	21	0
46	46	46	14	14	6	21	0
174	46	46	14	14	6	21	0
110	110	46	14	14	6	21	0
238	110	46	14	14	6	21	0
30	30	30	30	14	6	21	0
158	30	30	30	14	6	21	0
94	94	30	30	14	6	21	0
222	94	30	30	14	6	21	0
62	62	62	30	14	6	21	0
190	62	62	30	14	6	21	0
126	126	62	30	14	6	21	0
254	126	62	30	14	6	21	0
1	1	1	1	1	1	1	1
129	1	1	1	1	1	1	1
63	63	1	1	1	1	1	1
193	63	1	1	1	1	1	1
33	33	33	1	1	1	1	1
161	33	33	1	1	1	1	1
97	97	33	1	1	1	1	1
225	97	33	1	1	1	1	1
17	17	17	17	1	1	1	1
143	17	17	17	1	1	1	1
81	81	17	17	1	1	1	1
209	81	17	17	1	1	1	1
49	49	49	17	1	1	1	1
177	49	49	17	1	1	1	1
113	113	49	17	1	1	1	1
241	113	49	17	1	1	1	1
9	9	9	9	9	1	1	1
137	9	9	9	9	1	1	1
73	73	9	9	9	1	1	1
201	73	9	9	9	1	1	1
41	41	41	9	9	1	1	1
169	41	41	9	9	1	1	1

TABLE 2 PAGE 5

JAN-07-2000 06:24pm From-

15

T-115 P.006/007 F-075

105	105	41	9	9	1	1	1
233	105	41	9	9	1	1	1
25	25	25	25	9	1	1	1
153	25	25	25	9	1	1	1
89	89	25	25	9	1	1	1
217	89	25	25	9	1	1	1
57	57	57	25	9	1	1	1
185	57	57	25	9	1	1	1
121	121	57	25	9	1	1	1
249	121	57	25	9	1	1	1
5	5	5	5	5	5	1	1
133	5	5	5	5	5	1	1
69	69	5	5	5	5	1	1
197	69	5	5	5	5	1	1
37	37	37	5	5	5	1	1
165	37	37	5	5	5	1	1
101	101	37	5	5	5	1	1
229	101	37	5	5	5	1	1
21	21	21	21	5	5	1	1
149	21	21	21	5	5	1	1
85	85	21	21	5	5	1	1
213	85	21	21	5	5	1	1
53	53	53	21	5	5	1	1
181	53	53	21	5	5	1	1
117	117	53	21	5	5	1	1
245	117	53	21	5	5	1	1
13	13	13	13	13	5	1	1
141	13	13	13	13	5	1	1
77	77	13	13	13	5	1	1
205	77	13	13	13	5	1	1
45	45	45	13	13	5	1	1
173	45	45	13	13	5	1	1
109	109	45	13	13	5	1	1
237	109	45	13	13	5	1	1
29	29	29	29	13	5	1	1
157	29	29	29	13	5	1	1
93	93	29	29	13	5	1	1
221	93	29	29	13	5	1	1
61	61	61	29	13	5	1	1
189	61	61	29	13	5	1	1
125	125	61	29	13	5	1	1
253	125	61	29	13	5	1	1
3	3	3	-3	3	3	3	1
131	3	3	-3	3	3	3	1
67	67	3	3	3	3	3	1
195	67	3	3	3	3	3	1
35	35	35	3	3	3	3	1
163	35	35	3	3	3	3	1
99	99	35	3	3	3	3	1
227	99	35	3	3	3	3	1
19	19	19	19	3	3	3	1

TABLE 2 Pm

Jan-07-2000 08:24pm From-

16

T-116 P.008/007 F-076

147	19	19	19	3	31	31	1
83	83	19	19	3	31	31	1
211	83	19	19	3	31	31	1
51	51	51	19	3	31	31	1
179	51	51	19	3	31	31	1
115	115	51	19	3	31	31	1
243	115	51	19	3	31	31	1
11	11	11	11	11	31	31	1
139	11	11	11	11	31	31	1
75	75	11	11	11	31	31	1
203	75	11	11	11	31	31	1
43	43	43	11	11	3	31	1
171	43	43	11	11	3	31	1
107	107	43	11	11	3	31	1
235	107	43	11	11	3	31	1
27	27	27	27	11	3	31	1
153	27	27	27	11	3	31	1
91	91	27	27	11	3	31	1
219	91	27	27	11	3	31	1
59	59	59	27	11	3	31	1
187	59	59	27	11	3	31	1
123	123	59	27	11	3	31	1
251	123	59	27	11	3	31	1
7	7	7	7	7	7	3	1
135	7	7	7	7	7	3	1
71	71	7	7	7	7	3	1
199	71	7	7	7	7	3	1
39	39	39	7	7	7	3	1
167	39	39	7	7	7	3	1
103	103	39	7	7	7	3	1
231	103	39	7	7	7	3	1
23	23	23	23	7	7	3	1
151	23	23	23	7	7	3	1
87	87	23	23	7	7	3	1
215	87	23	23	7	7	3	1
55	55	55	23	7	7	3	1
183	55	55	23	7	7	3	1
119	119	55	23	7	7	3	1
247	119	55	23	7	7	3	1
15	15	15	15	15	7	3	1
143	15	15	15	15	7	3	1
79	79	15	15	15	7	3	1
207	79	15	15	15	7	3	1
47	47	47	15	15	7	3	1
175	47	47	15	15	7	3	1
111	111	47	15	15	7	3	1
239	111	47	15	15	7	3	1
31	31	31	31	15	7	3	1
159	31	31	31	15	7	3	1
95	95	31	31	15	7	3	1
223	95	31	31	15	7	3	1

TBA. -- P.

Jan-07-2000 05:25pm From-

17

T-115 P.007/007 F-076

63	63	63	31	15	71	3	1
191	63	63	31	15	71	3	1
127	127	63	31	15	71	3	1
255	127	63	31	15	71	3	1

TABLE 2 Area

The method of the invention allows for the selection of differing code lengths to maintain orthogonality among the assigned codes of different lengths while maintaining a larger number of available codes for data transmission. Figure 2 represents a flow chart of one embodiment of the novel methodology of the present invention for the selection
5 channel codes of different lengths. In this exemplary embodiment, channel code assignments are made for a 3G1X CDMA system of 128 chips per channel. It would be understood by one skilled in the art to expand the illustrated embodiment of the present invention to include channel code of even longer lengths.

Referring now to Figure 2, the method of the invention accepts as an input the
10 code block length that is required for the transmission of the user data. This length is typically negotiated between the transmitter and receiver during the establishment of the initial wireless connection.

The methodology then determines, at decision block 200, if the code length necessary for acceptable transmission is below a known value. In this exemplary
15 embodiment, and to maintain compatibility with current wireless communication systems, a known length corresponds to the code length for typical IS-95 voice transmission (*i.e.*, code length 64). If the code length is at or above this known limit, then a determination is made, at decision block 210, to distinguish between the two lengths illustrated.

When the desired rate is greater than the known value (in this exemplary case,
20 128), then the first channel from a list of 128-chip channel codes is selected at processing block 270. In this illustrated example, the list of channels is composed of 128 channels used in a 3G1X wireless communication system. Further, in the exemplary embodiment of the methodology illustrated, the first channel is selected by searching from the top of a list of 128-channel codes. As would be understood by those skilled in the art, the
25 selection of a first available channel may be preformed by numerous other methods. For example, the first channel may be determined beginning from the last 128-channel assigned.

Chen 1-20

19

At decision block 280, a determination is made of the availability of the selected channel. If the channel is unavailable, then the method of the invention progresses through the list of 128 channel codes at processing block 310 searching for the next channel. The next channel is subjected to tests for availability at decision block 280.

5 When a channel is determined to be available, then the channel is assigned to the user, at processing block 290, and the channel is marked as unavailable at processing block 300.

Returning to decision block 210, if the code length is equal to 64, then at processing block 220 the first available channel from a list of 64-chip channel codes is selected. When an available channel code is found, a check of the availability of all

10 longer-length channel codes that dependent from the selected shorter-length channel code is then made at decision block 230. In the illustrated embodiment, the two longer-length codes that dependent from the selected 64-chip channel would be checked for availability. Whenever one longer-length channel is determined to be unavailable, then the shorter-length channel cannot be assigned. Thus, at processing block 260, the next

15 available 64-chip channel code is selected for processing. The assignability of this 64-chip channel code is similarly determined by checking the availability of longer-length dependent channels.

When it is determined that the dependent channel codes are available, then the shorter-length channel is assigned to the user at processing block 240 and the shorter-length and dependent longer-length channels are marked as being unavailable at

20 processing block 250. As would be understood in the art, if the illustrated example were expanded to operate in a 3G3X system then the availability of the four 256-chip channels that depend from the two dependent 128-chip channels would also be checked.

Returning to decision block 210, when the length negotiated between transmitter

25 and receiver is less than a known value, then a shorter-length channel code that does not conflict with an already assigned longer-length channel must be assigned. In accordance with the method of the invention, a first channel is selected from an opposing end of a list of shorter-length channels at processing block 320. In the exemplary embodiment of

Chen 1-20

20

the methodology illustrated, the first channel of the shorter-length code is selected by searching from the bottom of a list of channel codes.

At decision block 330, a determination is made of the assignability of the selected channel by checking the availability of the longer-length channels that depend from the selected channel. In this illustrated embodiment of the invention in operation in a 3G1X wireless system, longer-length channel codes of, for example, length 64 and 128, respectively, depending from a selected shorter-length channel of length 32 are checked for availability.

When any dependent longer-length channel code is determined to be unavailable, the selected shorter-length channel code is not assignable and the next shorter-length channel code is selected at processing block 360. The ability to assign this selected channel is then determined by again checking the availability of dependent longer-length channel codes at decision block 330.

When all the dependent longer-length channel codes are determined to be available, then the selected shorter-length channel is assigned to the user, at processing block 340. The selected shorter-length channel code and all longer-length channel codes that are dependent from the shorter-length channel are then marked as unavailable at processing block 350.

In another embodiment of the invention, channel code availability may be maintained by a single availability indicator field associated with each of the channels of the longest-length channel codes. For example, in a 3G3X system of code sequence length of 256, one single structure of 256 entries, one for each channel, may be used to maintain an indication of the channel availability. In this embodiment, only the longest-length entries are marked as being unavailable. Accordingly, when a shorter-length channel code of W_{16} for example, is proposed for assignment, then those channels of the longest-length (i.e., W_{256}) that depend from the proposed shorter-length channel code are checked for availability. If any of the dependent W_{256} channels are unavailable, then the proposed W_{16} channel is also unavailable for assignment. If the dependent W_{256} channel

Chen 1-20

21

codes are available, then the shorter-length channel code is assigned to the user and the dependent W_{256} channel codes are marked as unavailable.

As would be understood by those skilled in the art, were the wireless system a 3G1X system then the longest-length code sequence is of order 128 and only 128 channels are checked for availability.

Accordingly, in this embodiment of the invention only one availability structure maintains the availability status of channel codes of different length. Similarly, in this embodiment of the invention, selection of relatively longer-length channel codes is performed by selecting channel codes by progressing from one end of a list of channel codes and selecting shorter-length channel codes by progressing from an opposing end of a list of channel codes. For example, longer-length codes may be selected by progressing from the bottom to the top of a list of channel codes, and shorter-length codes would then be selected by progressing from the top to the bottom of the list of channel codes.

In still another, and the preferred, embodiment of the invention the availability of shorter-length channel code may be determined from the availability of longer-length channels only. In this embodiment, both the selection of a shorter-length code and its availability for assignment is determined from the availability the longest-length codes. In this embodiment of the method of the invention, when codes of the longest length are to be assigned a search is made for an available channel code from a first end of a list of longest-length codes within the system. This available channel code is then assigned and marked as unavailable.

Whenever, a transmission requires the assignment of a shorter-length code of length n , then the longest-length channels codes that contain a shorter length code of length n are determined. This determination may be performed, for example, by truncating the longest-length code to length n . A group of channel codes is then formed from those longest-length channel codes that contain the truncated channel code of length n . The availability of the channel codes within this group is then determined.

Chen 1-20

When each of the longest-length channel codes within this group of channels of truncated channel codes is available for assignment, then the shorter-length code may be assigned to a data transmission. The corresponding longer-length channel codes contained within the group of channels of truncated channel code are then marked as unavailable. Figure 3 illustrates one implementation of this preferred embodiment of the invention in a proposed 3G3X system having a longest length code of 256-chips per symbol.

In Figure 3, a check is first made, at decision block 510, to determine the code length selected for transmission. If the code length, n , is not less than a known value, then a determination is made of the specific length to be assigned at decision block 520. If the length is the longest-length channel code in the system, then the first available code is found by progressing, from a first end, through a list of longest-length channel codes at processing block 530. In this illustrated embodiment of the invention, the longest-length codes are selected from the top of a list of longest length codes. The code is assigned to the user at processing block 540 and marked as unavailable at processing block 550.

Returning to decision block 520, if the desired code length is not the longest-length code sequence, then the first available code of longest-length is selected at processing block 560 by progressing through, from a first end, a list of longest-length channel codes. In this illustrated example, the longest-length codes are chosen from the top of the list of longest length codes.

A shorter length code of length, n , may then be determined from the longest length code, for example, by truncating the longest-length code to length n . Numerous methods of determining shorter length codes from longer length codes would be understood by those skilled in the art and need not be discussed in detail herein. One such method is a table-lookup, similar to an expanded Table 1.

A search of longest-length codes that have a common shorter-length code of length n is then made at processing block 580. A check of the availability of all the

Chen 1-20

23

longest-length codes containing the common shorter-length code is then made at decision block 590. If any of the longest-length codes are unavailable for assignment, then the shorter-length code is also unavailable for assignment. Accordingly, a next available longest length code is chosen at processing block 620 and the search process in processing block 580 and the availability check of decision block 590 are repeated. If all the longest-length codes having a common shorter-length code of length n are available, then this common shorter length code is assigned to the user at block 600 and the longest-length codes that contain this common shorter-length code are marked as unavailable at block 610.

Returning to decision block 510, if the channel code length is less than a known length, then the first available channel code is selected at processing block 630 by progressing through a of list of longest-length channel codes from a second end of a list of longest-length channel codes. In this illustrated example, the selection of channel codes of less than a known value is performed from the bottom of a list of longest-length channel codes.

A search of longest-length codes that have a common shorter-length code of length n is then made at processing block 650. A check of the availability of all the longest-length codes containing the common shorter-length code is then made at decision block 660. If any of the longest-length codes are unavailable for assignment, then the shorter-length code is also unavailable for assignment. Accordingly, a next available longest-length code is selected at processing block 690 and the search process of processing block 650 and the availability check of decision block 690 are repeated. If all the longest-length codes having the common shorter-length code are available, then the shorter length code is assigned to the user at block 670 and the longest-length codes that contain the common shorter-length code are marked as unavailable at block 680.

As would be understood, assigning high order channel codes from top to bottom and low order channel codes from bottom to top, as in the illustrated examples is advantageous. In this management of the channel code assignment, minimal constraints in assigning channel codes of shorter length exist with regard to conflicts and channel

Chen 1-20

24

code availability. Further, transmissions requiring longer-length channel codes are grouped together with channel codes at one end of a list of channel codes and shorter-length channel codes are grouped with channel codes in the opposing end of a list of channel codes. Accordingly, a larger number of channel codes remain grouped together
5 in the center of a list of channel codes to accommodate the assignment of short length channel codes.

In still another embodiment of the invention, channels may be pre-set to be unassignable to carry user voice or data traffic. In accordance with the method of the invention, channels may be *a priori* set to not carry user traffic by specifying a channel
10 code of the longest-length as unavailable. Accordingly, the method of the invention is thus comparable with current IS-95 standards as the reserved Synch, Pilot and Paging channels may be maintained as unavailable by pre-setting the appropriate channel code indicator. In yet another embodiment of the invention, the reserved channels for Synch, Pilot and Paging channels may be specified in a single reserved channel. For example,
15 channel 16 of a 3G3X (W_{256}) or a 3G1X (W_{128}) system may be used as a fixed channel. This fixed channel may contain information as to which channels are used for Synch, Pilot and Paging channels. In this manner, selection of pre-assigned Synch, Pilot and Paging channels may be performed dynamically and as needs and requirements change.

The present invention provides a novel method of dynamically assigning channel
20 codes of different length in response to a mixed voice and high data rate transmission environment of the next generation wireless communication systems. Further, the invention provides for the pre-assigning of channels associated with the overhead processing of wireless communication systems. This flexibility in the pre-assignment of channels in accordance with the method of the invention provides designers with the
25 freedom to assign channels dynamically to adapt to changing requirements.

Those skilled in the art will recognize that there are many configurations of wireless systems not specifically described herein but for which the methodology of the invention may be applied. Although the invention is described in various illustrative embodiments, there is no intent to limit the invention to the precise embodiments

Chen 1-20

25

disclosed herein. In particular, the invention can be utilized for third-generation mobile or personal communication systems that offer a multitude of data services in different operating scenarios, such as telephony, teleconference, voice mail, program sound, video telephony, video conference, remote terminal, user profile editing, telefax, voiceband data, database access, message broadcast, unrestricted digital information, navigation, location and Internet access services. The management of the channel assignment in accordance with the method of the invention can also be utilized on any system that assigns elements of differing lengths that are dependently related and must prevent conflicts in the assignment.

10 Numerous modifications and alternative embodiments of the invention will be apparent to those skilled in the art in view of the foregoing description. Accordingly, this description is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the best mode of carrying out the invention and is not intended to illustrate all possible forms thereof. It is also understood that the words used are words
15 of description, rather than of limitation. Details of the structure may be varied substantially without departing from the spirit of the invention and the exclusive use of all modifications which come within the scope of the appended claims is reserved.

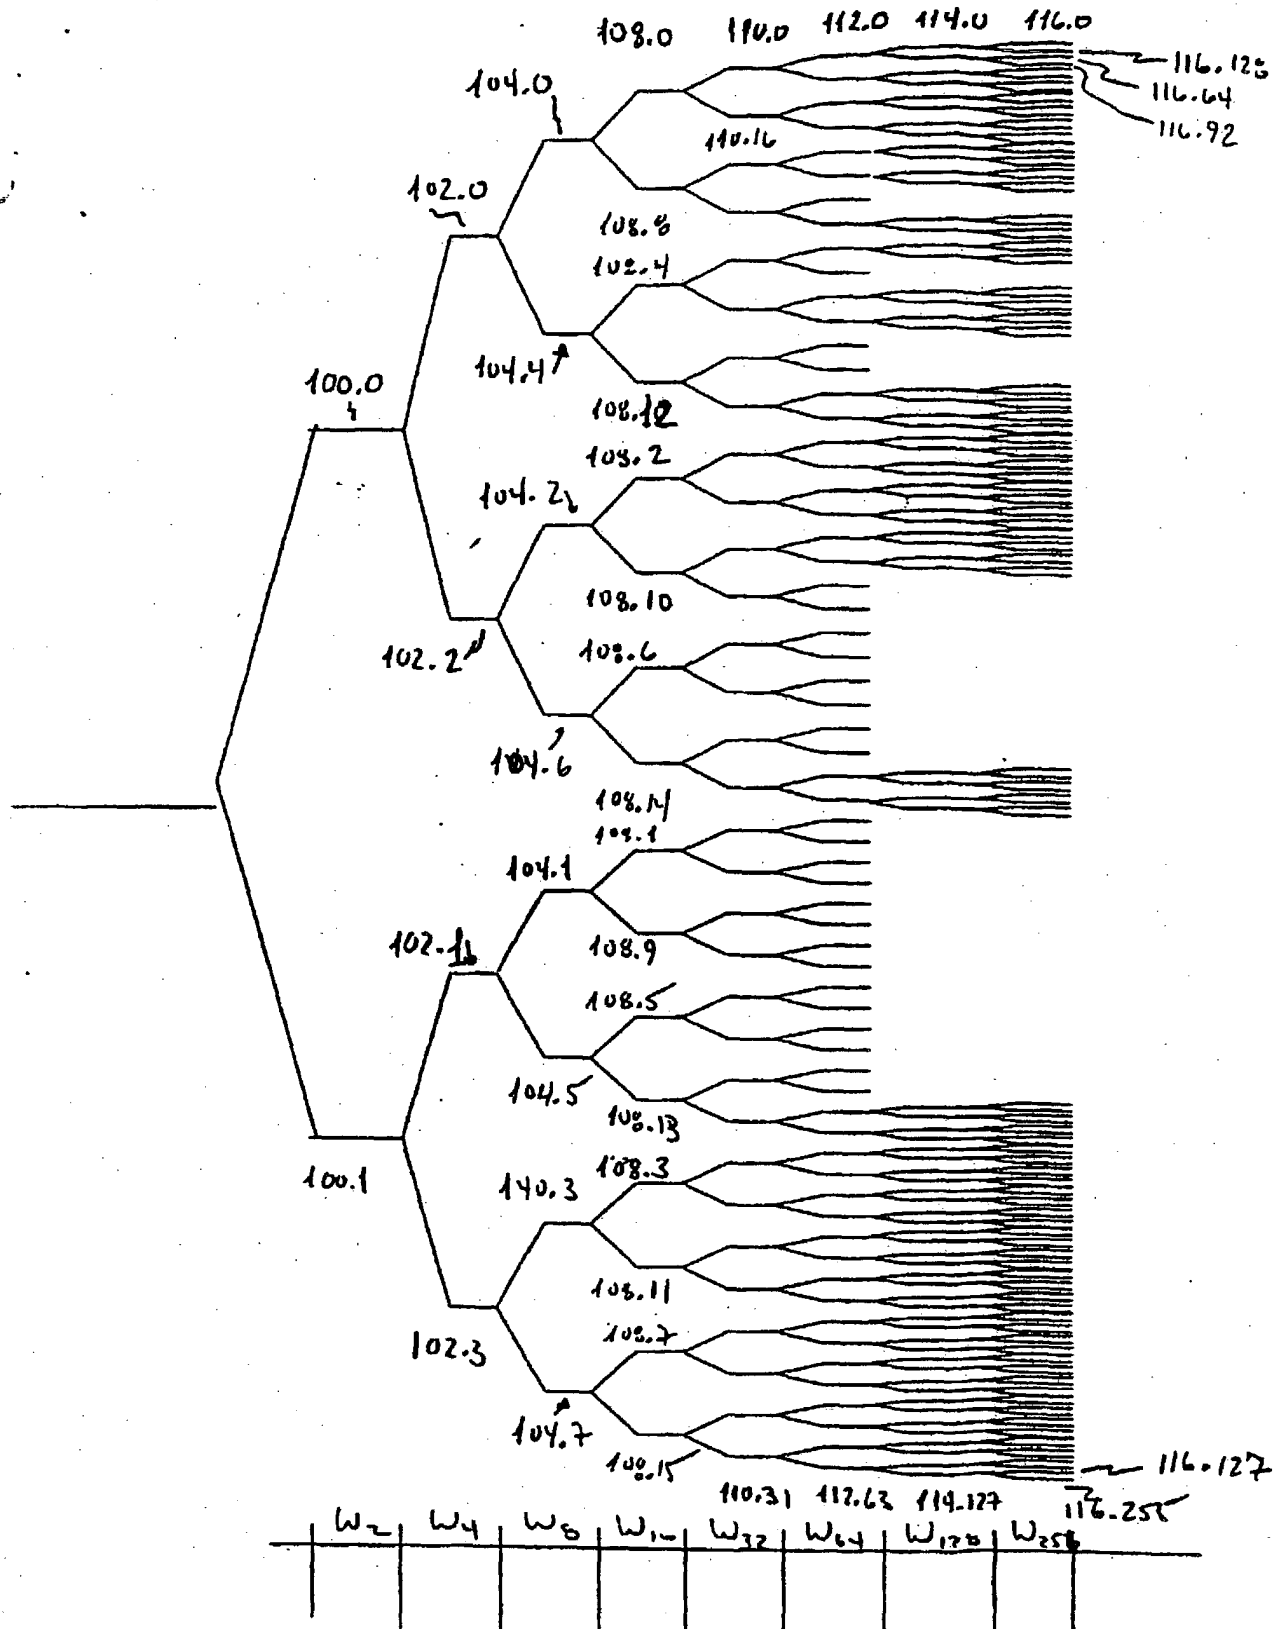


Figure 1

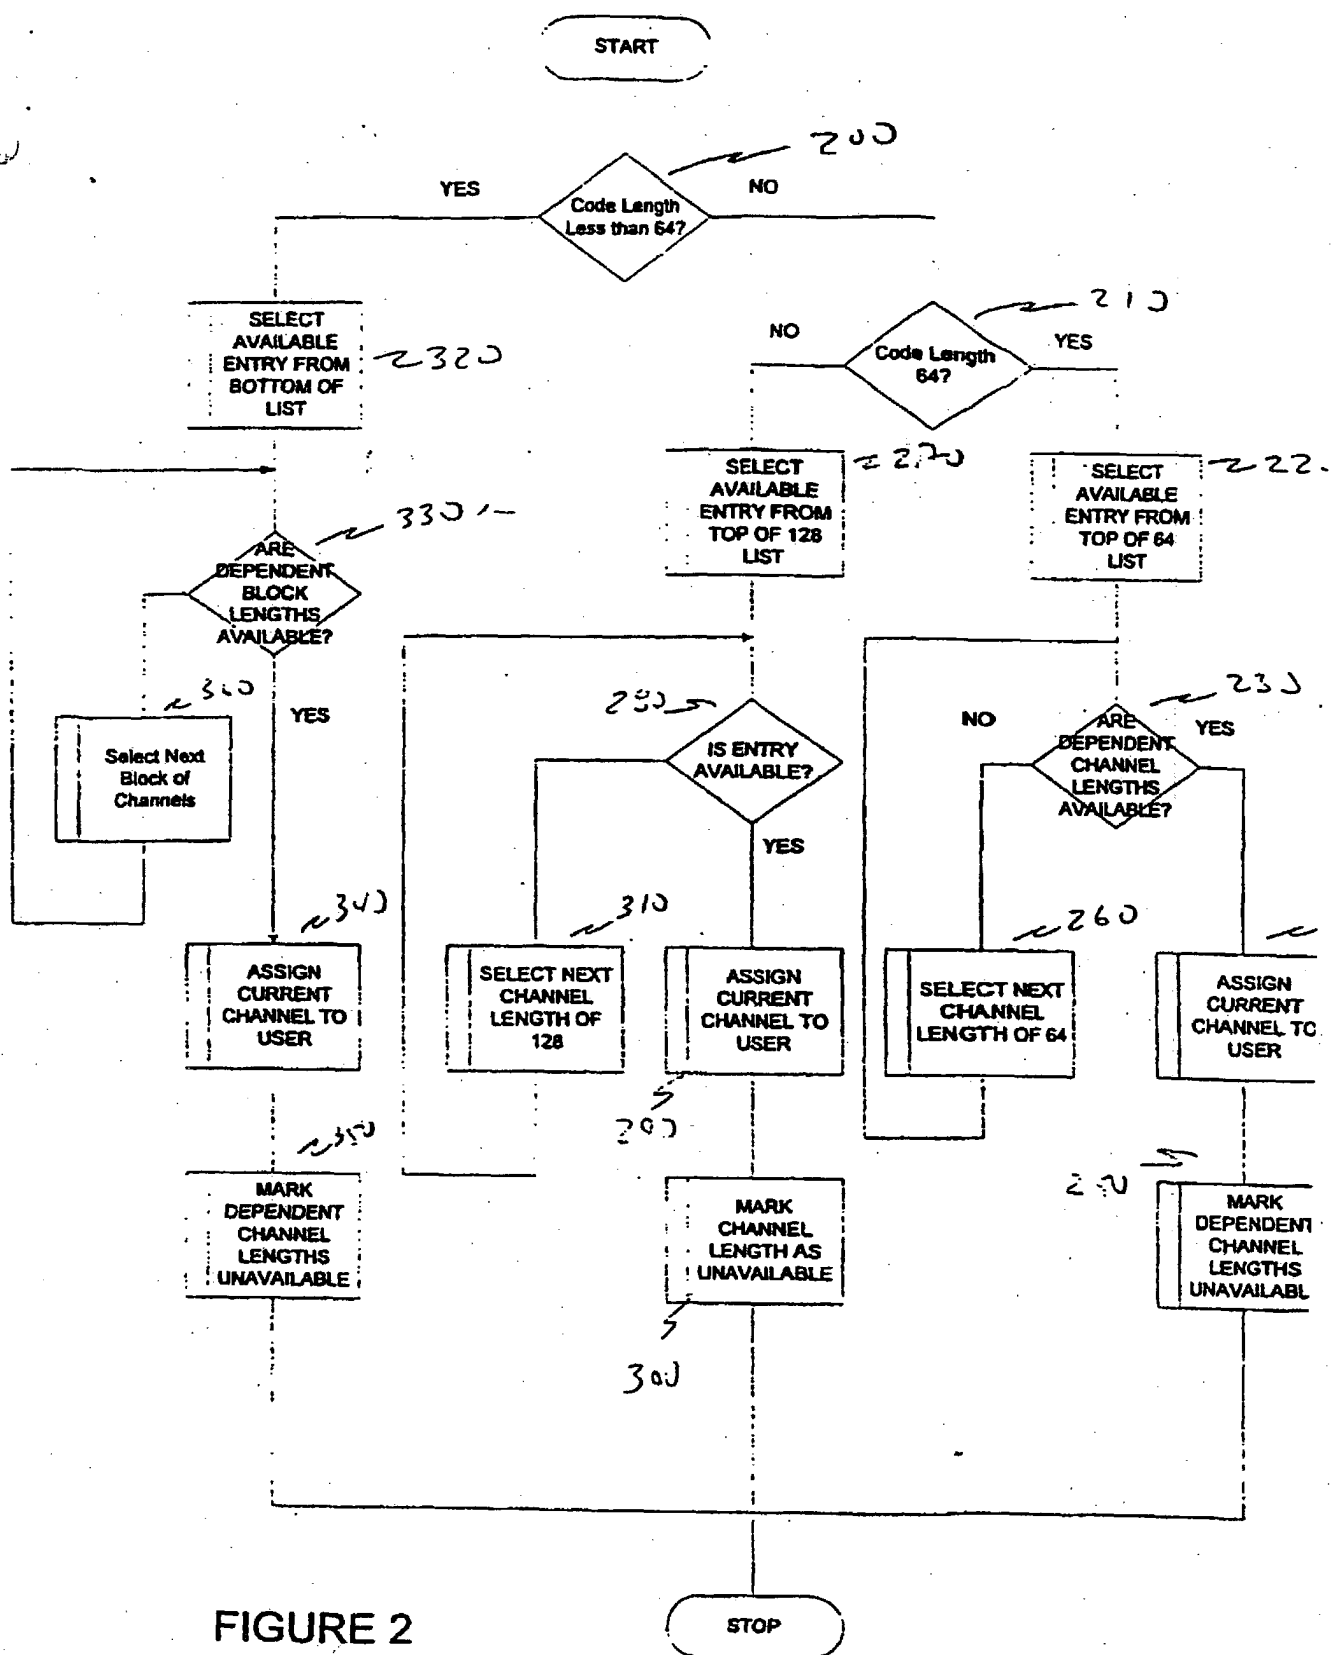


FIGURE 2

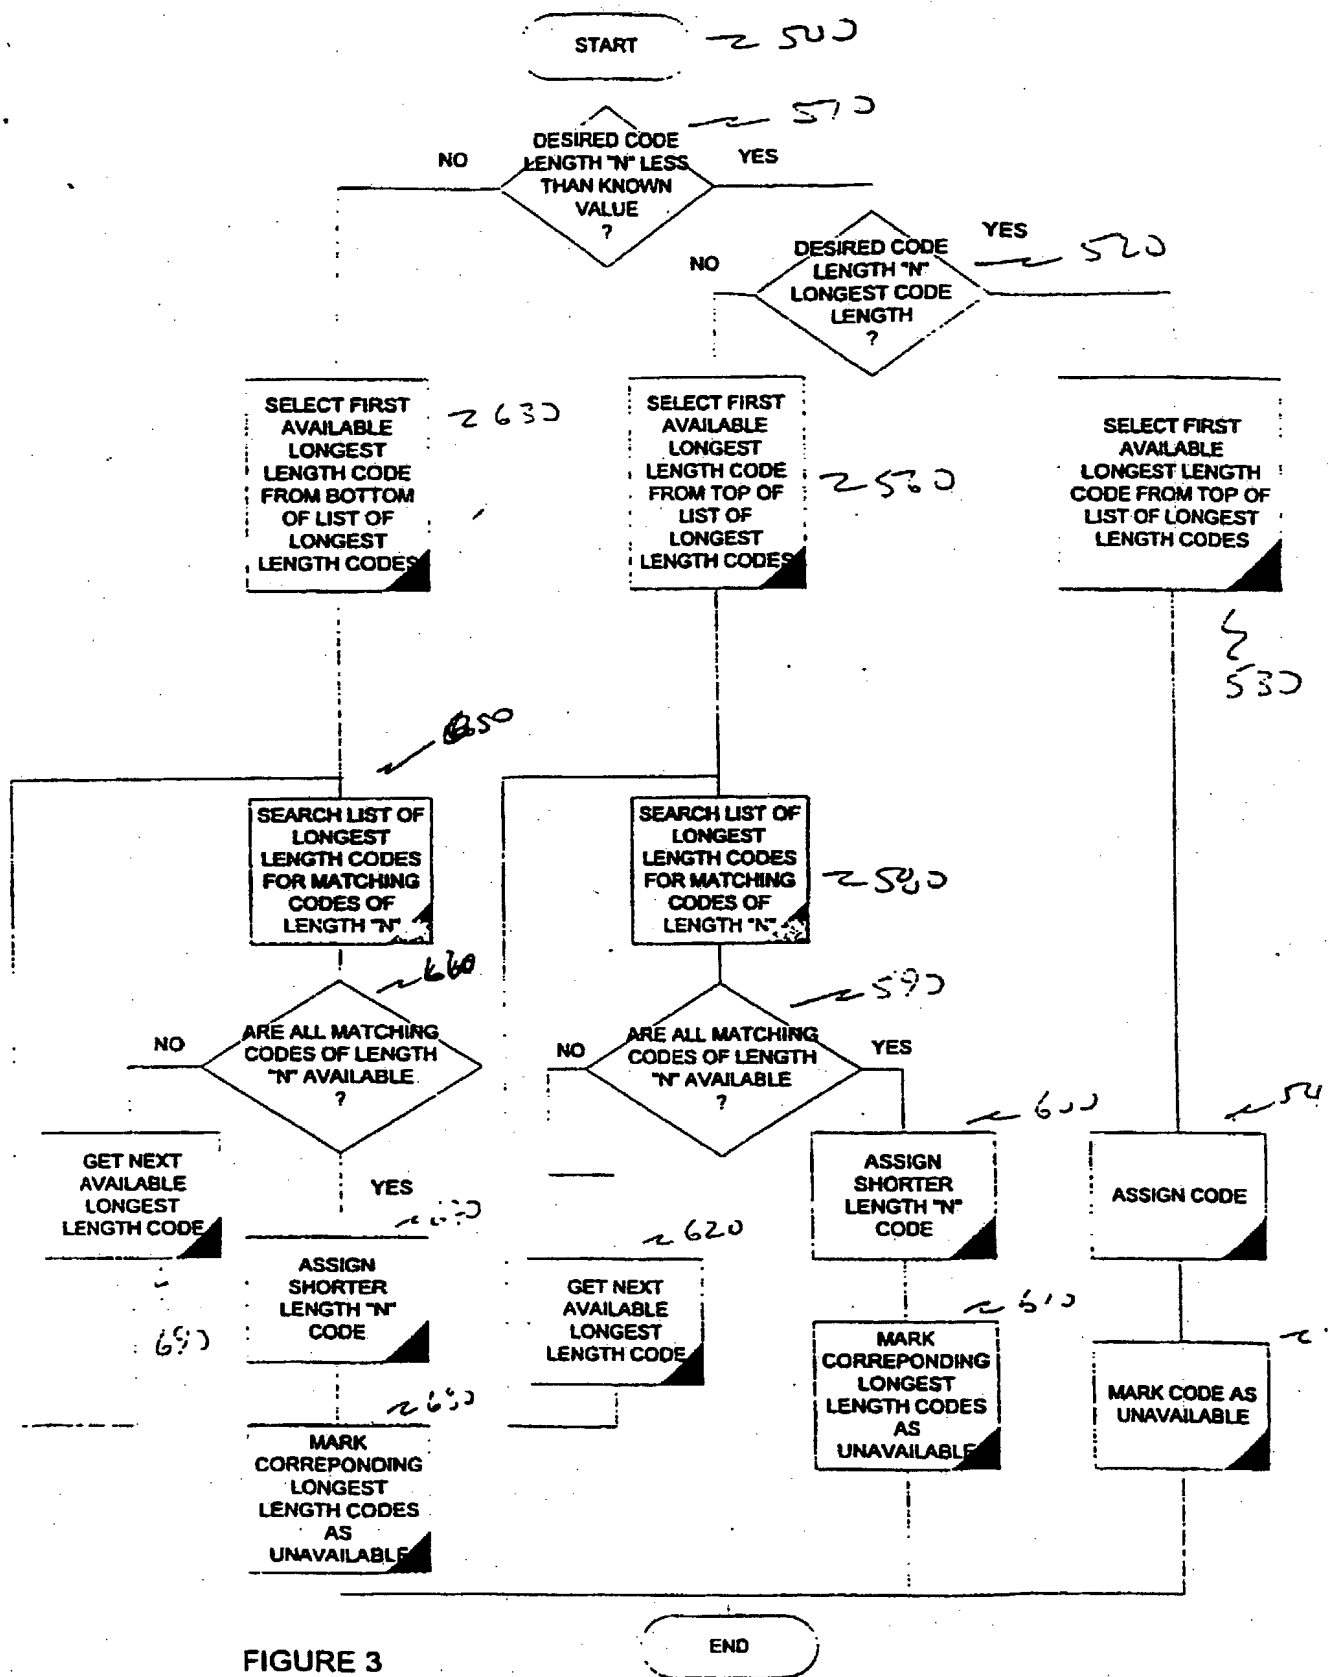


FIGURE 3

해외

1차 거절이유통지 및 검토의뢰서

수 신 : WCDMA개발 (발명자: 박 병 준)

■ 수원 □ 기흥

발 신 : 삼성전자(주) 정보통신총괄 지적자산팀 선임 박 형 순 (TEL:031-279-5047 FAX:031-279-5514)

국내출원번호(국가) : P2002-758 (US)

해외출원번호 : 10/337,454 (US)

발명의 명칭 : 전세계 위치 시스템/관성 센서를 이용한 사용자 단말기 측위 장치 및 방법

출원종류 : 일반출원

회신기한일: 2004년 11월 2일

본건 거절 이유통지서는 심사단계에서 특허청 심사관이 아래의 이유에 의거, 거절 통보한 것입니다.

거절사유

- ☐ 당해 기술분야에서 통상의 지식을 가진자가 용이하게 창작할 수 있음.
공지 또는 간행물에 기재된 유사 선행기술이 있음 (인용참증)
- ☐ 출원명세서 또는 도면의 기재가 불명료함(내용불명)
- ☒ 인용참증 + 내용불명
- ☐ 미완성
- ☐ 심사전치
- ☐ 기타

본 발명의 고안자는 상기의 거절이유를 극복할 수 있도록 거절 이유 검토의뢰서를 작성하셔서 기일내에 특허팀으로 송부하여 주시고, 그외의 서류는 발명자용 FILE에 철하여 직접 관리하여 주시기 바랍니다.

별 첨 : 1. 현지대리인의 2. 심사통지서 3. 인용참증(USP 5,563,611 외 1건)

<사무소 의견>

추 후 송 부

전산입력사항(해외심사화면)

○S.R ○1차 ●2차(최종) ○3차 ○4차 ○5차

통 지 일		당 사		통 보 일	
통 지 일	2004년 9월 2일	접 수 일	입력당일	당사검토일	
해외대리인	2004년 9월 15일	마 감 일	2004년 12월 2일	국내대리인	
국내대리인	2004년 9월 16일	거절사유	상기거절사유참조	제 출 일	
기술담당자	황 은 정	지재담당자	선임 박 형 순		

이 건 주 특허사무소 TEL : (02)744-0305

담당자 : 황은정/최주희

사무소관리번호 : P10114-US/ST

FAX : (02)743-5248